

european downstream oil industry safety performance

statistical summary of reported incidents – 2004

Prepared for the CONCAWE Safety Management Group by

J-F. Larivé (Technical Coordinator)

Reproduction permitted with due acknowledgement

© CONCAWE
Brussels
December 2005

ABSTRACT

The eleventh such report by CONCAWE, this issue includes statistics on work-related personal injuries for the downstream oil industry's own employees as well as contractors for the year 2004. Data was received from 18 companies representing over 80% of the European refining capacity. Trends over the last twelve years are highlighted and the data is also compared to similar statistics from related industries.

KEYWORDS

accidents, AIF, CONCAWE, FAR, fatality, incidents, injury, LWI, LWIF, marketing, oil industry, refining, RAR, RWI, safety, statistics

INTERNET

This report is available as an Adobe pdf file on the CONCAWE website (www.concawe.org).

NOTE

Considerable efforts have been made to assure the accuracy and reliability of the information contained in this publication. However, neither CONCAWE nor any company participating in CONCAWE can accept liability for any loss, damage or injury whatsoever resulting from the use of this information.

This report does not necessarily represent the views of any company participating in CONCAWE.

CONTENTS		Page
SUMMARY		IV
1.	INTRODUCTION	1
2.	PERFORMANCE INDICATORS	3
3.	2004 RESULTS	5
4.	HISTORICAL TRENDS	8
5.	COMPARISON WITH OTHER SECTORS	14
6.	REFERENCES	15
APPENDIX 1	EUROPEAN OIL INDUSTRY STATISTICS DEFINITIONS AND GUIDING NOTES	16

SUMMARY

The collection and analysis of accident data is an essential element of a modern safety management system and its importance is recognised throughout the oil industry.

CONCAWE started compiling statistical data for the European downstream oil industry twelve years ago and this is the eleventh report on this topic (see references of past reports in the reference list [1-10]). This report covers data collected for 2004 and includes a full historical perspective from 1993. It also includes comparative figures from other industry sectors. Data for 2004 was submitted by 18 companies, together accounting over 80% of the refining capacity of EU-25.

The results are reported mainly in the form of key performance indicators that have been adopted by the majority of oil companies operating in Western Europe as well as by other branches of industry.

Accident frequencies in the downstream oil industry in Western Europe are now at low levels and have been maintained so throughout the period of reporting. Overall, the 2004 performance appears slightly improved compared to previous years confirming the trend observed in previous years. Standing at 3.2, the Lost Work Incident Frequency (LWIF) for 2003 is down from 3.9 in 2002 and the lowest recorded so far. The responsible management of safety in the oil industry has resulted in a low level of accidents compared to other industries in Europe despite the intrinsic hazards of the materials handled and the operations carried out. The fatal accident rate has, however, been steadily increasing in recent years, road accidents accounting for nearly 50% of all fatalities.

1. INTRODUCTION

The collection and analysis of accident data is an essential element of a modern safety management system and its importance is recognised throughout the oil industry.

CONCAWE started compiling statistical data for the European downstream oil industry eleven years ago and this is the tenth report on this topic (see references of past reports in the reference list). This report covers data collected for 2004 and includes a full historical perspective from 1993. It also includes comparative figures from other industry sectors.

The term "Downstream" represents all activities of the industry from receipt of crude oil to products sales, through refining, distribution and retail. Not all companies operate in both the manufacturing and marketing areas but all those who do, collect data separately for "Manufacturing" (i.e. refining) and "Marketing" (i.e. distribution and retail, also including "head office" staff) and this dichotomy has also been applied in the CONCAWE data. In addition the data is split between own personnel and contractors, the latter being fully integrated in all companies safety monitoring systems.

The purpose of collecting this information is twofold:

- To provide member companies with a benchmark to compare their performance against, so that they can determine the efficacy of their management systems, identify shortcomings and take corrective action.
- To demonstrate that the responsible management of safety in the downstream oil industry results in a low level of accidents despite the hazards intrinsic to its operations.

From the outset the majority of CONCAWE member companies participated so that the sample always represented a large portion of the industry. By 1995 virtually all CONCAWE member companies participated, representing about 90% of the European refining capacity (somewhat less for distribution and retail). Over the years this level of participation has been maintained, although the actual number of participating companies fluctuated in line with the structural changes and mergers occurring in the industry. For 2004, 18 companies responded although not all companies could supply all the requested data.

The area of coverage is primarily the former EU-15 plus Norway and Switzerland and also includes Hungary and Slovakia. In addition some companies include in their data their operations in other new EU countries such as Poland and the Czech Republic and, in some cases, Turkey.

A number of key performance indicators have been adopted by the majority of oil companies operating in Western Europe as well as by other branches of industry. Although there are differences in the way different companies collect basic data, these fairly straightforward parameters allow an objective comparison. There are differences between companies in the precise definition or interpretation of basic parameters, so that direct comparison of data from different companies could lead to erroneous conclusions. For this reason we do not report individual company data but rather aggregates and averages with range of variation.

It is noteworthy that the majority of participating companies are willing to share their data openly with other companies. This indicates that they feel that safety is a non-competitive issue where all can learn from the experience of others and help other companies to improve.

2. PERFORMANCE INDICATORS

A number of performance indicators have become “standard” in the oil industry and in many other sectors. They are mostly expressed in terms of event frequency, the number of hours worked being the common denominator of activity. Such parameters have the advantage to rely on a small number of straightforward input parameters and to allow collection of meaningful statistics even when the data sets are incomplete. The performance indicators considered in this report are:

- The number of work-related fatalities and the associated Fatal Accident Rate (FAR) expressed in number of fatalities per 100 million hours worked.
- The All Injury Frequency (AIF) including all recordable injuries and expressed in number of injuries per million hours worked.
- The Lost Workday Injury Frequency (LWIF) including all injuries leading to lost work time and expressed in number of lost workdays per million hours worked.
- Related to LWIF is the Lost Workday Severity (LWIS) expressing the average number of lost workdays per LWI.
- The Road Accident Rate (RAR) expressed in number of road accidents per million kilometres travelled.

A more complete set of definitions is given in **Appendix 1**.

There are, however, still subtle differences in the way these parameters are used by different companies and how the data is collected and reported. The features, relevance and reliability of each indicator are further discussed below.

Fatalities and FAR

Because of their very low numbers, fatalities and therefore FAR are not reliable indicators of the safety performance of a company or industry. A single accident can produce several fatalities and cause the indicator to shoot up for a certain year. Conversely the lack of fatalities is certainly no guarantee of a safe operation. Indeed the well-known safety triangle indicates that fatalities are the long-term consequence of attitudes and practices that do not provide for appropriate reaction to near-misses, relatively minor incidents and more serious accidents.

LWIF and LWIS

This is the most common indicator in the oil industry and other industries and has been in use for many years. It is now common practice to include not only own staff but also contractors in the statistics and this is done virtually universally in the oil industry. All companies without exception collect employee LWIF data for at least their own staff and this is therefore the most representative and reliable indicator of all.

Not all companies keep track of the number of lost days so that the overall LWIS has to be calculated taking account only of those companies that report such data.

AIF

As LWIF figures become progressively lower, they are less likely to change significantly year-to-year and are prone to wider variations. Companies that have achieved very low LWIF levels therefore need a more meaningful indicator to monitor trends and detect improvements or deterioration of performance. AIF provides such an indicator since it records fatalities, restricted work injuries (RWI) and Medical Treatment Cases (MTC) in addition to LWIs. Although it is still less widely used than LWIF, reporting improves year by year with more companies turning to this indicator. It should also be noted that not all companies operate a restricted work system and also restricted working is not allowed in some countries, which is a potential cause of some distortion in the AIF data.

As the total number of injuries is not reported by all companies only the worked hours for which this number is available is taken into account in the calculation of the overall AIF figure.

RAR

It is no surprise that road accidents are a major cause of both fatalities and lost time injuries so that a number of companies have taken to monitoring these separately. The data is still patchy and there are also issues as to the precise definition of a road accident. The overall figures should therefore be considered as indicative only. For this reason we only report RAR data for the whole downstream industry and all personnel involved (own staff and contractors) as we consider the level of reporting insufficient for the segmented data to be significant. It must be noted, however, that the vast majority of road accidents occur in distribution and retail activities where both sales employees and truck drivers cover a large mileage.

3. 2004 RESULTS

Table 1 summarises the number of submissions and illustrates some key aspects of the data that was not supplied by all companies.

Table 1 Completeness of submissions for 2004

No of companies	Manufacturing		Marketing	
	Own staff	Contractors	Own staff	Contractors
Submission	18	15	16	14
Including				
Lost days	14	11	12	10
All injuries	17	15	13	11
Road accidents	9	3	11	10
Distance travelled	5	2	9	8

All companies submitted data for own Manufacturing staff. Only one company did not submit data for Marketing own staff (1 company has no retail activities). Total own staff injuries are recorded by all companies but this is not the case for lost days. A number of companies do not record road accidents separately and even fewer log the distance travelled. Contractor data is generally patchier.

The aggregated 2004 results per sector and for the whole of the downstream oil industry are shown in **Table 2**. **Figure 1** shows the average performance indicators and their range of variability amongst reporting companies. For LWIF, which is the most universally used indicator, we also show the distribution per quartile for the different sectors (**Figure 2**).

Table 2 Aggregated 2004 results for all reporting companies

Sector		Manufacturing			Marketing			Both Sectors		
		OS	CT	AW	OS	CT	AW	OS	CT	AW
Work Force										
Hours worked	Mh	91	81	172	197	145	341	288	226	513
Fatalities		3	5	8	0	4	4	3	9	12
Fatal Accident Rate	F/100 Mh	3.3	6.2	4.6	0.0	2.8	1.2	1.0	4.0	2.3
Lost work incidents	LWI	170	291	461	768	403	1,171	938	694	1,632
Lost time through LWI	days	8,031	7,817	15,848	16,659	13,907	30,566	24,690	21,724	46,414
LWI frequency	LWI/Mh	1.9	3.6	2.7	3.9	2.8	3.4	3.3	3.1	3.2
LWI severity	LWI/lost day	50.8	30.0	37.8	25.3	42.9	31.1	30.2	37.1	33.1
All recordable incidents	AI	594	830	1,424	1,236	465	1,701	1,830	1,295	3,125
All incidents frequency	AI/Mh	6.6	10.2	8.3	6.6	3.3	5.2	6.8	5.7	6.6
Distance travelled	Tm							428	588	1016
Road Accidents	RA							775	324	1099
Road Accident Rate	RA/Tm							1.81	0.55	1.08

OS: Own staff; CT; Contractors; AW: All workers

Figure 1 Average 2004 performance indicators with range of variability



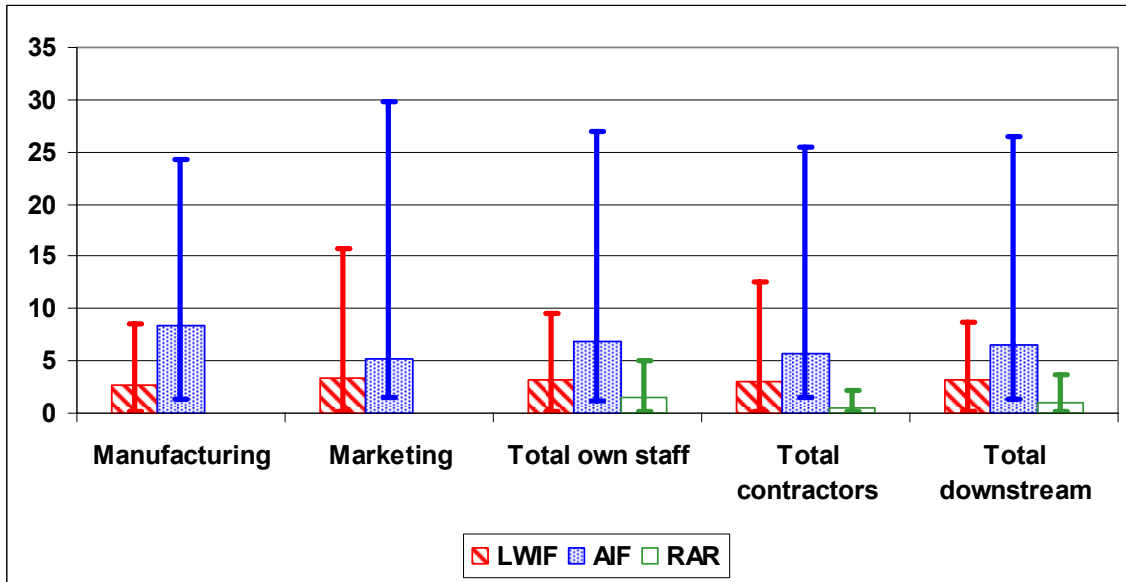


Figure 2 LWIF distribution
Average value for each quartile

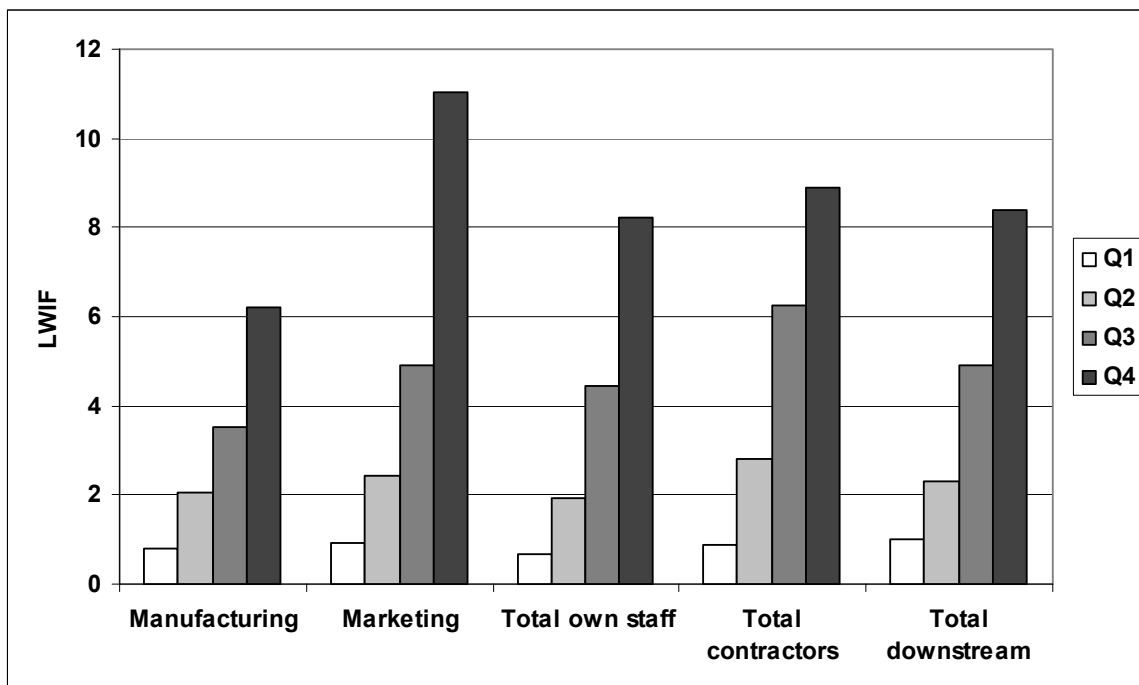

The average performance indicator figures clearly hide a wide range of individual values, with a factor of up to 10 between reporting companies. **Figure 3** shows that the variability is much less when looking at year-on-year figures for each company individually.

Figure 3 Year-on-year performance indicator variations
Average for all reporting companies

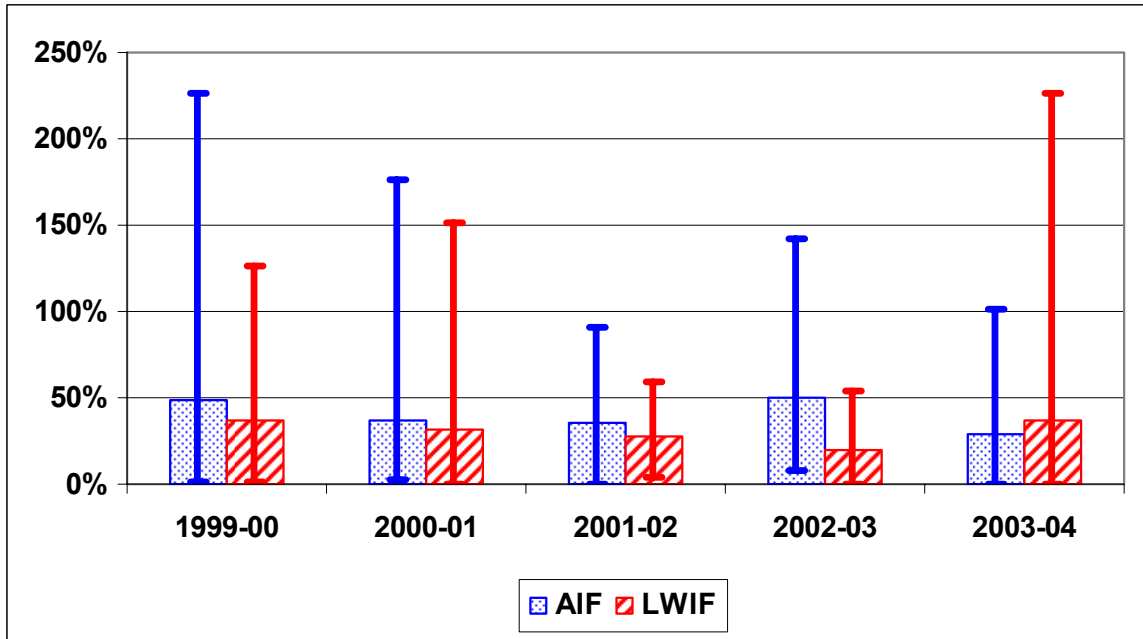

In other words, there are large differences in reported figures from company to company and these differences do not change much over the years. This reflects genuine levels of performance achieved by different companies but also differences in the way companies monitor and classify incidents and collect their data.

4. HISTORICAL TRENDS

The performance indicators are of particular interest when considering their evolution over the years. The historical trends for the downstream oil industry as a whole are shown in **Figures 4a/b** and **Table 3**.

Figure 4a Historical evolution of main performance indicators
Yearly data for the whole downstream industry

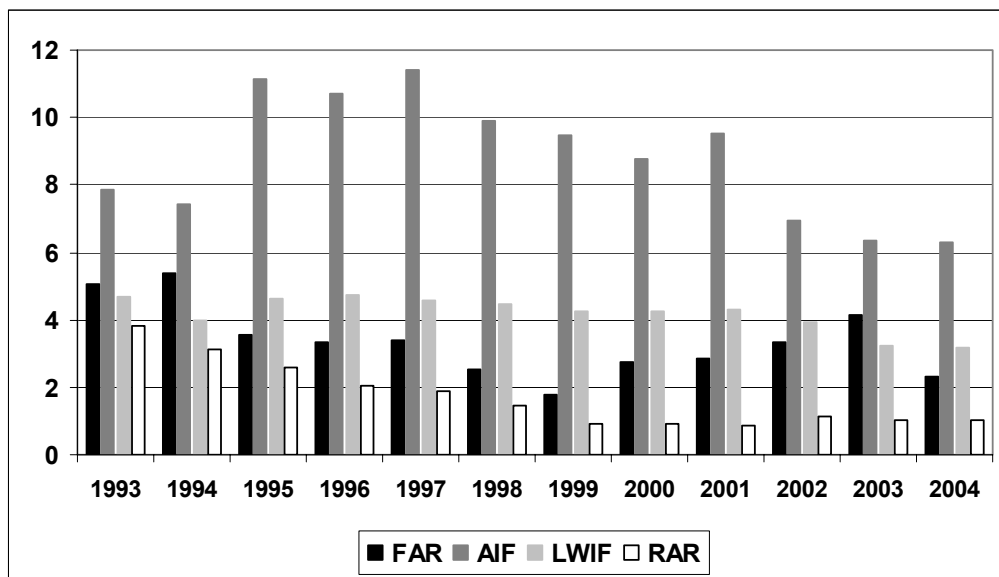


Figure 4b Historical evolution of main performance indicators
3-year rolling average for the whole downstream industry


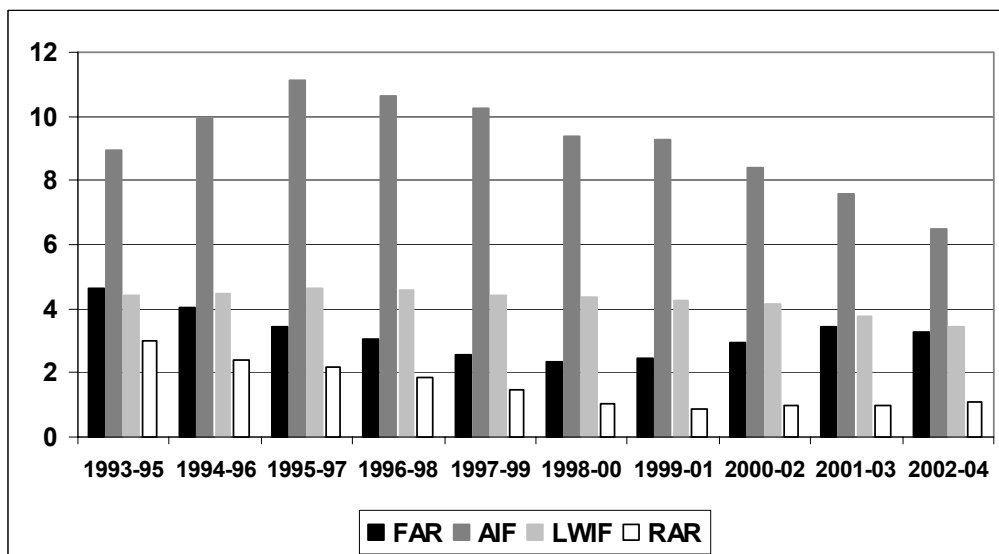


Table 3 Historical evolution of performance indicators

Year	Fatalities	FAR	AIF	LWIF	LWIS	RAR
1993	18	5.0	7.9	4.7	27	3.8
1994	19	5.4	7.4	4.0	25	3.1
1995	13	3.5	11.2	4.6	24	2.6
1996	14	3.3	10.7	4.7	19	2.0
1997	15	3.4	11.4	4.6	23	1.9
1998	12	2.6	9.9	4.5	22	1.5
1999	8	1.8	9.4	4.3	21	0.9
2000	13	2.7	8.8	4.3	25	0.9
2001	14	2.8	9.5	4.3	24	0.8
2002	16	3.3	6.9	3.9	23	1.1
2003	22	4.1	6.3	3.2	30	1.0
2004	12	2.3	6.3	3.2	33	1.0
Averages						
1993-2004	176	3.3	8.7	4.1	24	1.4
3-year rolling average						
1993-95	50	4.6	8.9	4.4	25	3.0
1994-96	46	4.0	9.9	4.5	22	2.4
1995-97	42	3.4	11.1	4.6	22	2.2
1996-98	41	3.1	10.7	4.6	21	1.9
1997-99	35	2.6	10.3	4.4	22	1.5
1998-00	33	2.4	9.4	4.3	23	1.0
1999-01	35	2.5	9.3	4.3	23	0.9
2000-02	43	3.0	8.4	4.1	24	1.0
2001-03	52	3.5	7.6	3.8	25	1.0
2002-04	50	3.3	6.5	3.4	28	1.1

Figure 5 shows the 3-year rolling average for FAR, AIF and LWIF segmented into the Manufacturing and Marketing activities, each separated between own staff and contractors.

Figure 5 Historical evolution of main performance indicators segmented 3-year rolling average

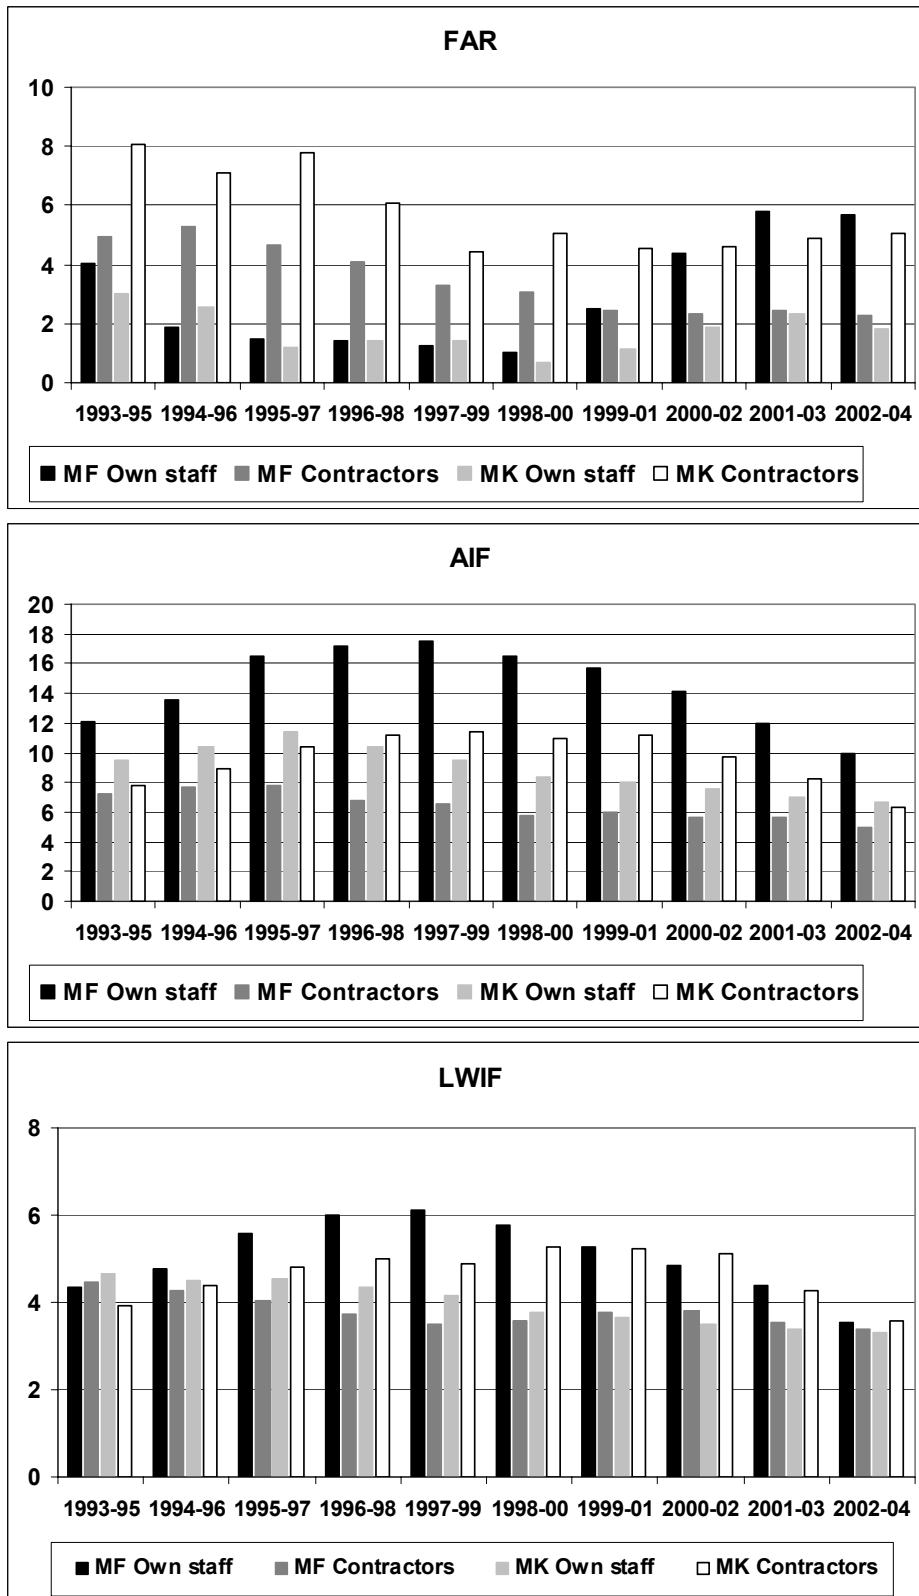

Fatality numbers had been increasing in recent years and the 2004 figure corrects this trend, returning to the levels observed in the late 90s. As discussed in chapter 3, FAR is notoriously prone to large variations but the trend was still clearly unfavourable. The improvement comes almost exclusively from a large reduction of the marketing contractors fatalities, from 12 in 2003 (half of which from road accidents) to 4 in 2004.


Overall the other indicators show a steady performance over the years with slow but steady reduction of LWIF. This indicator has shown greater reductions in Manufacturing than in Marketing and the 2004 figures for the 4 categories are very close.

The figures suggest that AIF peaked around the 1996-97 but this is more probably the result of improved reporting standards. Since then the trend is definitely on a downward slope. AIF figures have improved for all categories.

Road traffic accidents were tremendously reduced compared to the early years but the rate appears to have now reached a plateau. These accidents essentially occur in the Marketing activity where the bulk of the driving takes place.


The number of reporting companies has changed over the years. Especially in view of the large differences observed between companies, it can be argued that the yearly figures are therefore not completely consistent. A similar analysis has been performed, restricting the data to the 11 companies that have reported since the original 1993 survey (including those companies that have merged). As an example **Figure 6** shows the LWIF for both sets. Although the values are generally somewhat lower for the original participating companies, the trends are generally similar.

Figure 6 Comparison of LWIF evolution for all reporting companies and original participants

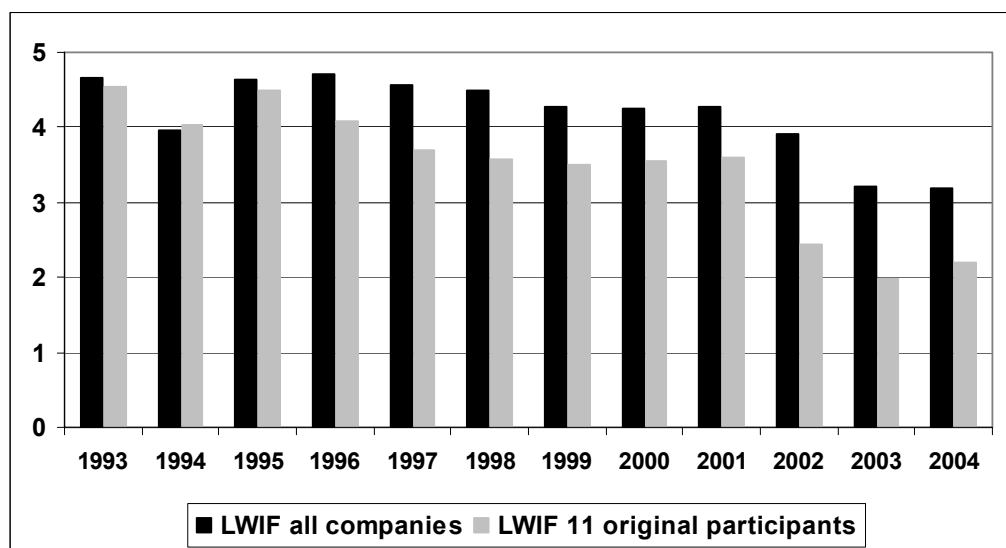

One point of particular interest is the “safety triangle” i.e. the relationship between the total number of recordable incidents or the number of LWIs and the number of fatalities. This is shown in **Figure 7**.

Figure 7 The safety triangle

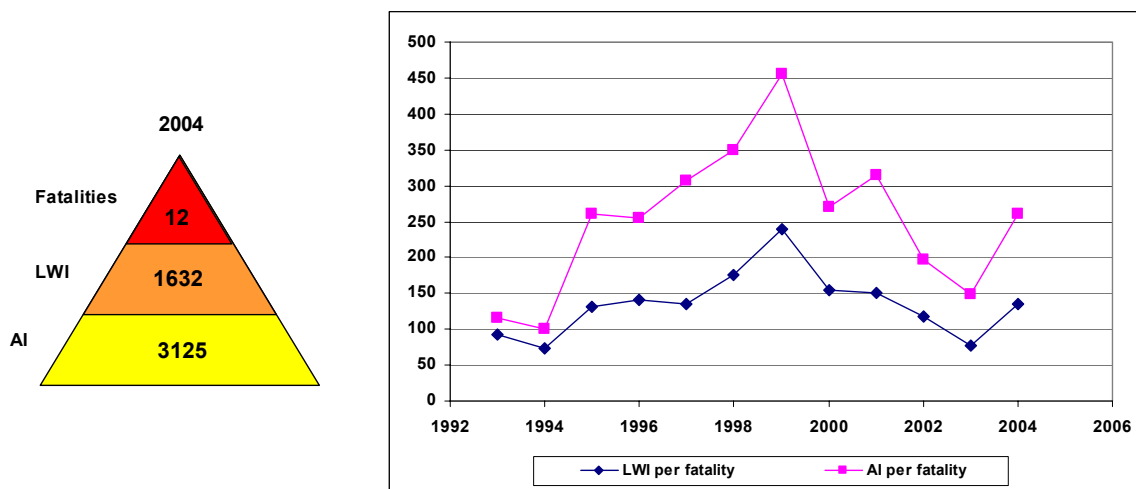

The figure illustrates the declining number of fatalities until 1999 whereas the total number of incidents remained fairly constant. The period from 2000 to 2003 saw a steady increase in fatalities while both AI and LWI were still on a decreasing trend, resulting in a decrease of the ratios. The lower number of fatalities in 2004 has reversed this trend.

Figure 8 details the causes of the 12 fatalities recorded in 2004 and **Figure 9** shows the percentage of the main causes over the last 5 years. In 2004 5 fatalities, i.e. 40%, were due to road accidents. After a temporary dip in 2002, road remains the main cause of fatalities. Again this year there were four deaths related to fires and explosions, hazards associated with our industry.

Over the last 5-year period road accidents and construction/maintenance activities remain the principal causes of fatalities.

Figure 8 Causes of fatalities in 2004


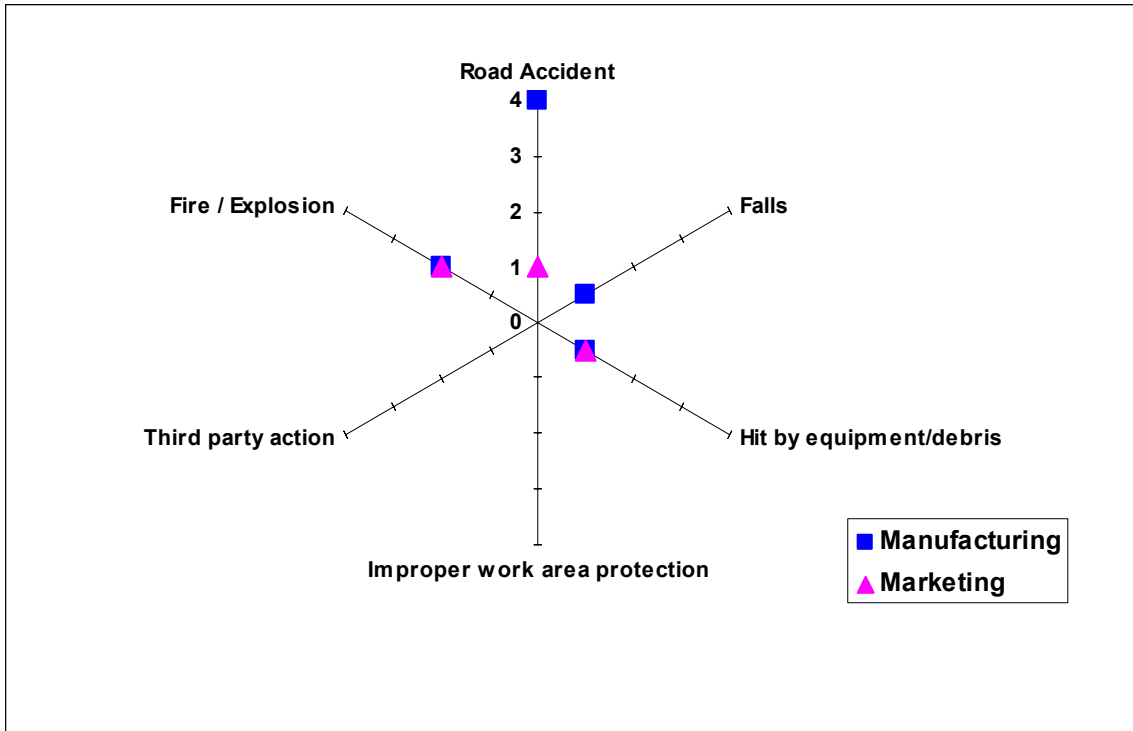


Figure 9 Causes of fatalities between 1998 and 2004

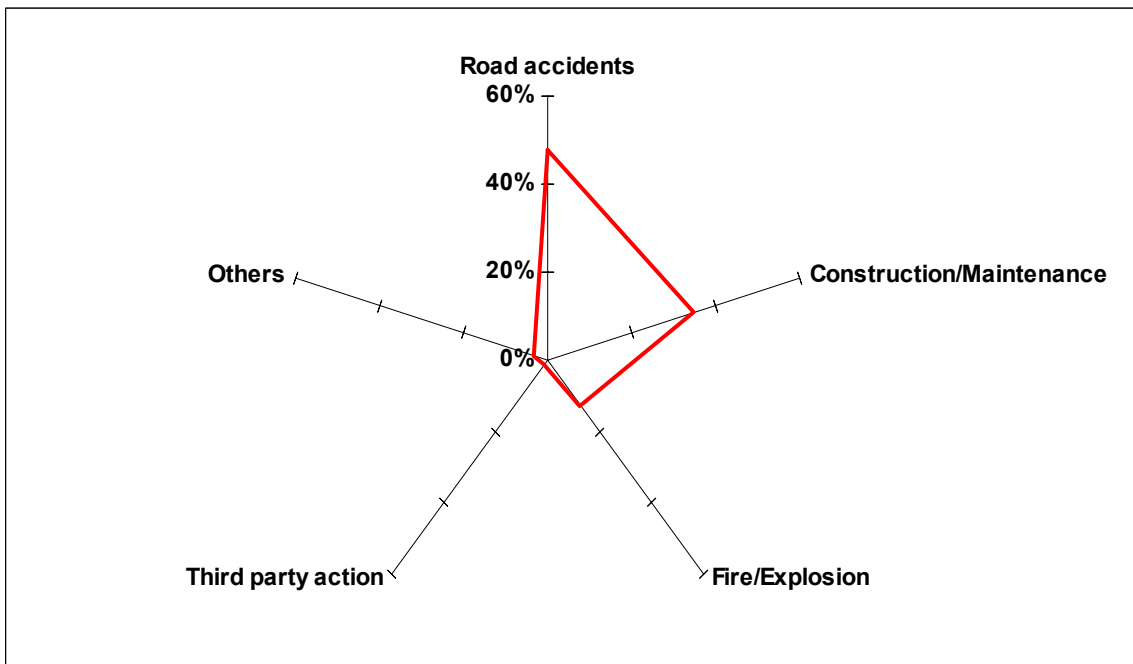

5. COMPARISON WITH OTHER SECTORS

Most of the safety performance indicators used in the oil industry, and particularly LWIF, have also been adopted in many other sectors so that meaningful comparisons are possible.

Table 4 Comparison of the safety performance of the downstream oil industry with other industry sectors

	CONCAWE 2004	OGP 2004		CEFIC 2002
		Europe	World	
FAR	2.3	NA	5.2 ⁽¹⁾	1.4
AIF	6.3	5.6	3.9	NA
LWIF	3.2	1.6	1.1	6.2

OGP Oil & Gas Producers

CEFIC Conseil Européen des Fédérations de l'Industrie Chimique

⁽¹⁾ Own staff and contractors only

The OGP statistics concern the “upstream” oil industry covering oil and gas exploration and production activities. This sector shows a better performance than the downstream, which was also the case in previous years.

The chemical industry data, collected by CEFIC, are less favourable in terms of LWIF.

6. REFERENCES

1. CONCAWE (1996) European downstream oil industry safety performance. Statistical summary of reported incidents – 1993 & 1994. Report No. 1/96. Brussels: CONCAWE
2. CONCAWE (1996) European downstream oil industry safety performance. Statistical summary of reported incidents – 1995. Report No. 3/96. Brussels: CONCAWE
3. CONCAWE (1997) European downstream oil industry safety performance. Statistical summary of reported incidents – 1996. Report No. 4/97. Brussels: CONCAWE
4. CONCAWE (1998) European downstream oil industry safety performance. Statistical summary of reported incidents – 1997 and overview 1993 to 1997. Report No. 4/98. Brussels: CONCAWE
5. CONCAWE (1999) European downstream oil industry safety performance. Statistical summary of reported incidents – 1998. Report No. 1/99. Brussels: CONCAWE
6. CONCAWE (2000) European downstream oil industry safety performance. Statistical summary of reported incidents – 1999. Report No. 1/00. Brussels: CONCAWE
7. CONCAWE (2001) European downstream oil industry safety performance. Statistical summary of reported incidents – 2000. Report No. 3/01. Brussels: CONCAWE
8. CONCAWE (2002) European downstream oil industry safety performance. Statistical summary of reported incidents – 2001. Report No. 2/03. Brussels: CONCAWE
9. CONCAWE (2004) European downstream oil industry safety performance. Statistical summary of reported incidents – 2002. Report No. 6/04. Brussels: CONCAWE
10. CONCAWE (2004) European downstream oil industry safety performance. Statistical summary of reported incidents – 2003. Report No. 11/04. Brussels: CONCAWE
11. OGP (2005) Safety performance indicators 2004. Report No. 367. London: International Association of Oil & Gas Producers
12. CEFIC (2004) Responsible care reporting 2003. Brussels: Conseil Européen des Fédérations de l'Industrie Chimique
http://www.cefic.be/files/Publications/performance_data_2004.pdf

APPENDIX 1 EUROPEAN OIL INDUSTRY STATISTICS DEFINITIONS AND GUIDING NOTES

1. Hours worked Hours worked by employees and contractors. Estimates should be used where contractor data is not available.
2. Fatality This is a death resulting from a work related injury where the injured person dies within twelve months of the injury.
3. LWI Lost Workday Injury is a work related injury that causes the injured person to be away from work for at least one normal shift because he is unfit to perform any duties.
4. Total days lost The number of calendar days lost through LWIs counting from the day after the injury occurred.
5. RWI Restricted Workday Injury is a work related injury which causes the injured person to be assigned to other work on a temporary basis or to work his normal job less than full time or to work at his normal job without undertaking all the normal duties.
6. MTC Medical Treatment Case is a work related injury which requires the attention of a medical practitioner. It excludes first aid treatment.
7. AIF All Injury Frequency which is calculated from the sum of fatalities, LWIs, RWIs and MTCs divided by number of hours worked expressed in millions.
8. LWIF Lost Workday Injury Frequency is calculated from the number of LWIs divided by the number of hours worked expressed in millions.
9. LWIS Lost Workday Injury Severity is the total number of days lost as a result of LWIs divided by the number of LWIs.
10. Distance travelled This is the distance, expressed in millions of kilometres, covered by company owned delivery vehicles and company cars whether leased or owned. It should also include kilometres travelled in employee's cars when on company business.
11. Road Accidents Any accident involving any of the vehicles described above.
12. RAR Road Accident Rate is calculated from the number of accidents divided by the kilometres travelled expressed in millions.
13. FAR Fatal Accident rate is calculated from the number of fatalities divided by the number of hours worked expressed in hundred millions.

Statistics to be collected under two groupings: Manufacturing (refineries) and Marketing.

Marketing includes all non-refining activities including "Head Office" personnel.

Where data is not available the best estimate possible should be made.